

MAXI

MAXI 4000T - MAXI 6000T


Late Fertilizing
Spreading width from 12 to 28 m




www.agrex.com



Hydraulic regulation of fertilizer quantity-control

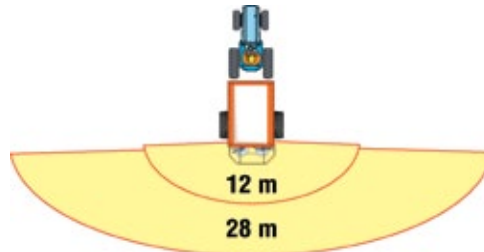

Spreading width: **28 m** Variation coefficient: 9,8
Fertilizer: Ammonium phosphate 18-49 Quantity: 311 kg/ha

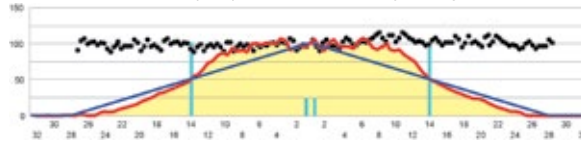

Rubber conveyor belt




Inspection ladder



DPA volumetric wheel



Distribution unit in steel

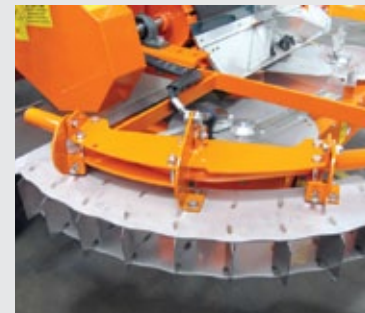

Edge limiter device (Optional)

Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)	Width (cm)	Height (cm)
MAXI 4000T	3.5	4240	1500	470	190	225
MAXI 6000T	5.0	4220	1580	470	190	252

The models MAXI and MAXI T are available in the **mechanical** and **hydraulic** version. Hydraulic model fitted with **computer for data management**: Computer for data management – Speed wheel sensor – Electrical wiring for the connection – Hydraulic motor belt control – Speed sensor of the belt – Hydraulic motor drive discs – Speed sensor of the discs

MAXI

MAXI 4000R - MAXI 6000R

Fertilizer spreader
for paddy fields



www.agrex.com

New



The fertilizer spreader for rice-field MAXI R is designed to meet the needs of the operator and professional contractor in the distribution of fertilizers and seeds. It is equipped with a raised axle with a variable track and with a discs distribution system. This system is designed specially for sowing rice in wet and for cultures in sandy lands with light and medium mixture.

This system can also be used to spread organic and chemical fertilizers on rice-field, making the spreader absolutely polyvalent. The loading hopper with a capacity up to 5 m³ allows loading fertilizers and seeds up to 6000 kg, ensuring an output of daily work greater than what you can get with the fertilizer trailed spreaders.

The bottom of the hopper is made of stainless steel and the distribution system consists of a conveyor in an anti-abrasive rubber with hydraulic transmission, which guarantees to work with a regular flow with low or high flow rates. The spreading is realized using two spreading discs with adjustable radial stainless steel vanes.



Models	Capacity (m ³)	Maximum load (kg)	Weight (kg)	Length (cm)
MAXI 4000 R (*)	3,5	6.000	1.430	473
MAXI 6000 R (*)	5,0	6.000	1.500	473

All models are equipped with: Manual flow regulation – Variable track axle – Hydraulic opening/closing of fertilizer flow – Standard filtering grids – PTO shaft – Stainless steel spreading discs – Stainless steel vanes for spreading up to 24 m – Tail lights – Inspection ladder – Document holder

(*) Model fitted with: Wheel speed sensor – Electrical wiring for the connection – Hydraulic motor belt control – Belt speed sensor